



DIMENSIONS unit=mm

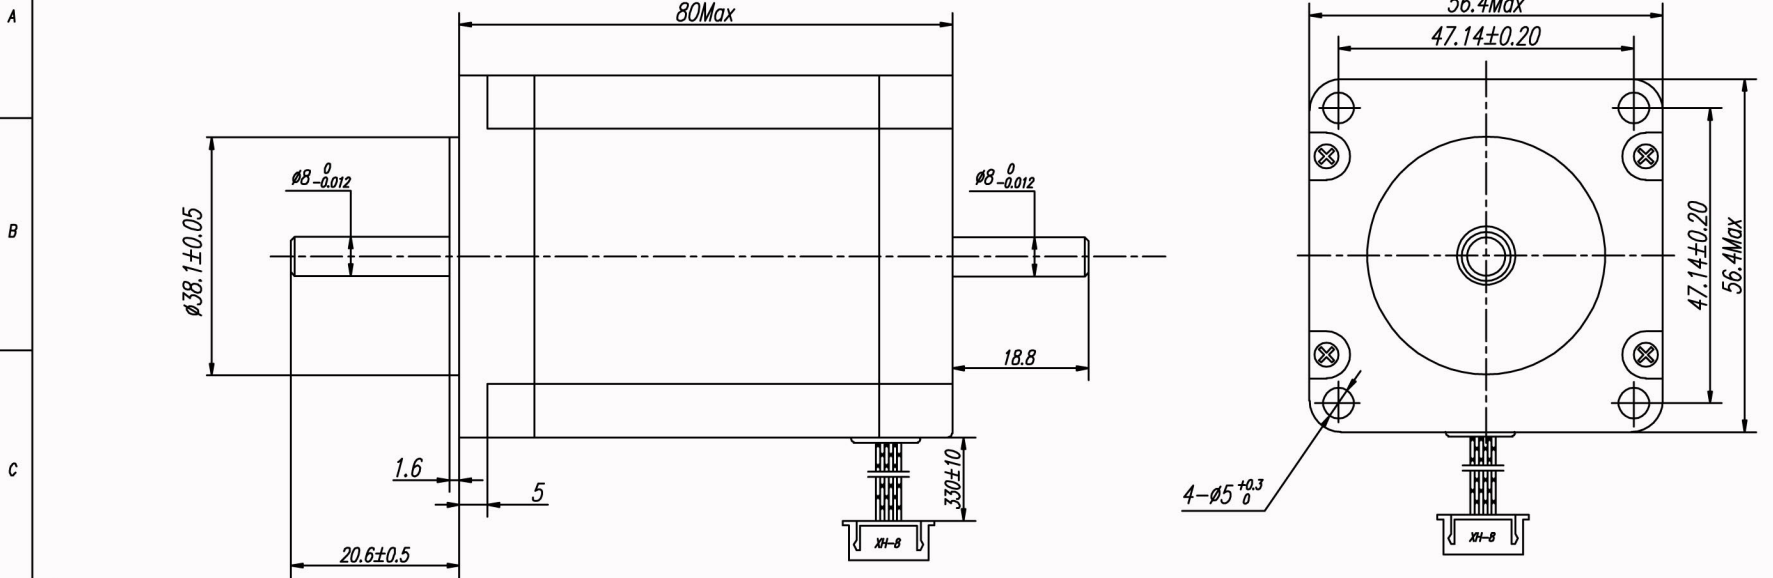

SPECIFICATIONS

PHASE	2	PHASE	COMMENT
STEP ANGLE	1.8±5%	°/STEP	<p>YEL RED ORG BLU</p> <p>XH-8</p>
VOLTAGE	3	V	
CURRENT	4	A/PHASE	
RESISTANCE	0.75±10%	Ω/PHASE	
INDUCTANCE	2.5±20%	mH/PHASE	
HOLDING TORQUE	200	N.cm	
DETENT TORQUE		N.cm	
INSULATION CLASS	B		
LEAD STYLE	AWG22 UL1007		

COLORS OF LEAD WIRES UNI-POLAR



						Part No.		
						M575TH80-4004D-8.0		
						Hybrid Stepper Motor		
						57mm x 80mm		
TAG	PLACE	CHANGE	NAME	DATE	DESIGN	MASS	PLATE	SCALE
DESIGN					STD.			
CHECK					APPROVE			
PROC.								
						NR	PAGE:	

**MOTION CONTROL PRODUCTS LIMITED**