


C08F3A1-300-110

3 Poles straight M8 female connector_3mt

CONNETTORE M8x1 FEMMINA DIRITTO
M8x1 STRAIGHT FEMALE CONNECTOR

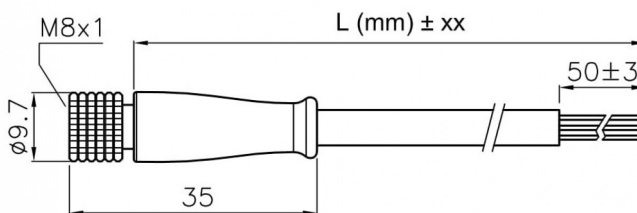


Vista Frontale
Front View

3 Poli / 3 Pole



Schema elettrico
Electrical diagram

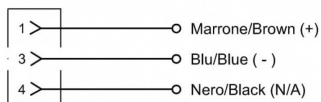

Length	3mt
Code	41031-030
EAN code	
Customrate	85444290

Series: Circular printed connectors for sensors/actuators, M8x1 series

Code/Initials	C08
Operating temperature	IEC 61076-2-104
Protection degree	IP67, IP68
Pollution degree	3
Operating temperature	-30°C ... +85°C
No unscrewing ring-nut	Nickel-plated Brass
Contacts material	Gold-plated Brass
External insulation	TPU (PUR) plastic
Contacts holder	PA plastic
Gasket	NBR (FKM on request)
Insulation resistance	$\geq 10^8 \Omega$
Resistance	$\leq 5m \Omega$
Mechanical operations	1000 Cycles max

Poles: 3 poles - M8x1 series

Number of poles	3
Max rating voltage	60V
Max rating current	4A

Cables: PUR/PVC cable 3 x 0,25 mm² 80°C 300V

Code/Initials	0193019NE-16 / 110
Sheat material	PUR/PVC
Sheat diameter	4,20 mm ± 0,20
Sheat color	BK, RAL 9005
Conductors section	3 x 0,25 mm ²
Insulation material of conductors	PVC
Structure of conductors	32 x 0,10 mm
Conductors color	brown, blu, black
Cable rating voltage	≤ 300 V
Alogen free	no
Radius of static installation	5 x diam. cavo
Radius of free installation	10 x diam. cavo
Work temperature	-25°C ... +80°C
Work temperature	-5°C ... +80°C
Shielding	no

Min-Tec Industriale S.r.l ©
Telefono: +39 031 760911 - E-Mail: info@mintec.it
C.F./P.I 11737780152