


**Standard Clamps (metric pitches) – Used for connecting both belt ends**

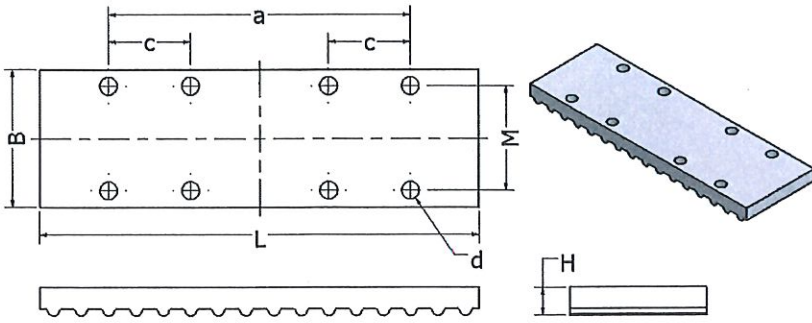

Clamp part description:

B x L (belt pitch) Type (O or B)  
 Type O = clamp with no holes  
 Type B = clamp with holes (shown)

Notes:

- Standard material is AL 6061
- 5 teeth minimum engagement recommended at each belt end

Standard Clamp Dimensions – AT Series Metric									
Belt Pitch	Belt Width b(mm)	Part Description	B(mm)	L (mm)	d (mm)	m (mm)	a (mm)	c (mm)	H (mm)
AT3	10	30 x 75 AT3 Clamp Type (O or B)	30	75	5.5	20	50	12.5	8
	20	50 x 75 AT3 Clamp Type (O or B)	50			30			
	25	60 x 75 AT3 Clamp Type (O or B)	60			38			
AT5	25	50 x 120 AT5 Clamp Type (O or B)	50	120	5.5	38	80	20	10
	32	60 x 120 AT5 Clamp Type (O or B)	60			46			
	50	75 x 120 AT5 Clamp Type (O or B)	75			62			
	75	110 x 120 AT5 Clamp Type (O or B)	110			94			
	100	140 x 120 AT5 Clamp Type (O or B)	140			124			
AT10 BAT10 BATK10	25	50 x 160 [Pitch] Clamp Type (O or B)	50	160	6.5	38	110	30	10
	32	60 x 160 [Pitch] Clamp Type (O or B)	60			46			
	50	75 x 160 [Pitch] Clamp Type (O or B)	75			62			
	75	110 x 160 [Pitch] Clamp Type (O or B)	110			94			
	100	140 x 160 [Pitch] Clamp Type (O or B)	140			124			
	150	190 x 160 [Pitch] Clamp Type (O or B)	190			174			
ATS15 BAT15 BATK15	25	50 x 180 [Pitch] Clamp Type (O or B)	50	180	9	38	140	50	20
	32	60 x 180 [Pitch] Clamp Type (O or B)	60			46			
	50	75 x 180 [Pitch] Clamp Type (O or B)	75			62			
	75	110 x 180 [Pitch] Clamp Type (O or B)	110			94			
AT20	25	50 x 200 AT20 Clamp Type (O or B)	50	200	9	38	160	60	20
	32	60 x 200 AT20 Clamp Type (O or B)	60			46			
	50	75 x 200 AT20 Clamp Type (O or B)	75			62			
	75	110 x 200 AT20 Clamp Type (O or B)	110			94			
	100	140 x 200 AT20 Clamp Type (O or B)	140			124			
	150	190 x 200 AT20 Clamp Type (O or B)	190			166			