

## 26.600 G

### OEM Pressure Transmitter Standard

#### Applications

- ▶ mechanical and plant engineering
- ▶ general industrial applications

#### Characteristics

- ▶ ceramic sensor
- ▶ accuracy 0.5 % FSO according to IEC 60770
- ▶ nominal pressure ranges from 0 ... 1 bar up to 0 ... 400 bar
- ▶ option: oil and grease free version



#### Technical Data

Input pressure range																
Nominal pressure gauge	[bar]	-1...0 <sup>1</sup>	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400
Nominal pressure abs.	[bar]	-	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400
Overpressure	[bar]	3	3	5	5	12	12	20	50	50	120	120	200	400	400	650
Burst pressure ≥	[bar]	4	4	7	7.5	15	18	30	70	75	150	180	300	500	750	1000
Vacuum resistance		unlimited														

<sup>1</sup> for this pressure range accuracy is ≤ 1 % FSO IEC 60770

Output signal / Supply				
Standard	2-wire:	4 ... 20 mA	/	V <sub>S</sub> = 8 ... 32 V <sub>DC</sub>
Options	3-wire:	0 ... 10 V	/	V <sub>S</sub> = 14 ... 30 V <sub>DC</sub>
	3-wire ratiometric:	10 ... 90 % of V <sub>S</sub>	/	V <sub>S</sub> = 2.7 ... 5 V <sub>DC</sub>

Performance			
Accuracy <sup>2</sup>	≤ ± 0.5 % FSO		for p <sub>N</sub> -1...0 bar: ≤ 1 % FSO
Permissible load	2-wire: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>Smin</sub> ) / 0.02 A] Ω		3-wire: R <sub>min</sub> = 10 kΩ
Influence effects	supply: 0.05 % FSO / 10 V		load: 0.05 % FSO / kΩ
Response time	2-wire: ≤ 10 msec		3-wire: ≤ 3 msec
Long term stability	≤ ± 0.3 % FSO / year at reference conditions		
Measuring rate	1 kHz		

<sup>2</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (offset and span) / Permissible temperatures				
Thermal error	≤ ± 0.3 % FSO / 10 K	in compensated range:	0 ... 85 °C	
Permissible temperatures	medium: -25 ... 125 °C	electronics / environment:	-25 ... 85 °C	storage: -40 ... 85 °C

Electrical protection			
Short-circuit protection	permanent	3-wire ratiometric:	none
Reverse polarity protection	no damage, but also no function		
Electromagnetic protection	emission and immunity according to EN 61326		


Mechanical stability			
Vibration	10 g, 25 Hz ... 2 kHz	according to	DIN EN 60068-2-6
Shock	500 g / 1 msec	according to	DIN EN 60068-2-27

Materials	
Pressure port / housing	stainless steel 1.4301 (304)
Seals (media wetted)	FKM <span style="float: right;">others on request</span>
Diaphragm	ceramics Al <sub>2</sub> O <sub>3</sub> 96 %
Media wetted parts	pressure port, seals, diaphragm
Miscellaneous	
Option oxygen application	for p <sub>N</sub> ≤ 25 bar: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C
Weight	approx. 120 g
Current consumption	2-wire: max. 25 mA <span style="float: right;">3-wire ratiometric: typ. 1.5 mA</span> 3-wire voltage: max. 7 mA (short circuit current: max. 20 mA)
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU <span style="float: right;">Pressure Equipment Directive: 2014/68/EU (module A) <sup>3</sup></span>


<sup>3</sup> this directive is only valid for devices with maximum permissible overpressure > 200 bar

### Wiring diagrams

2-wire-system (current)

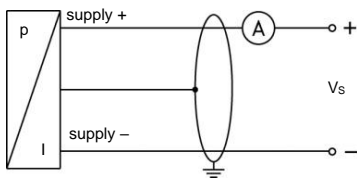


3-wire-system (voltage)

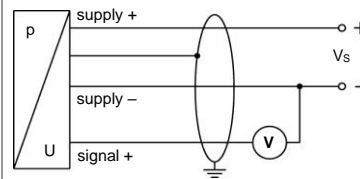

### Pin configuration

Electrical connection	ISO 4400	Micro (contact distance 9.4 mm)	M12x1 (4-pin), metal	cable colours (IEC 60757)
Supply +	1	1	1	
Supply -	2	2	2	BN (brown)
Signal + (for 3-wire)	3	3	3	GN (green)
Shield	ground pin	ground pin	4	GYNE (green-yellow)

### Electrical connections (dimensions mm / in)

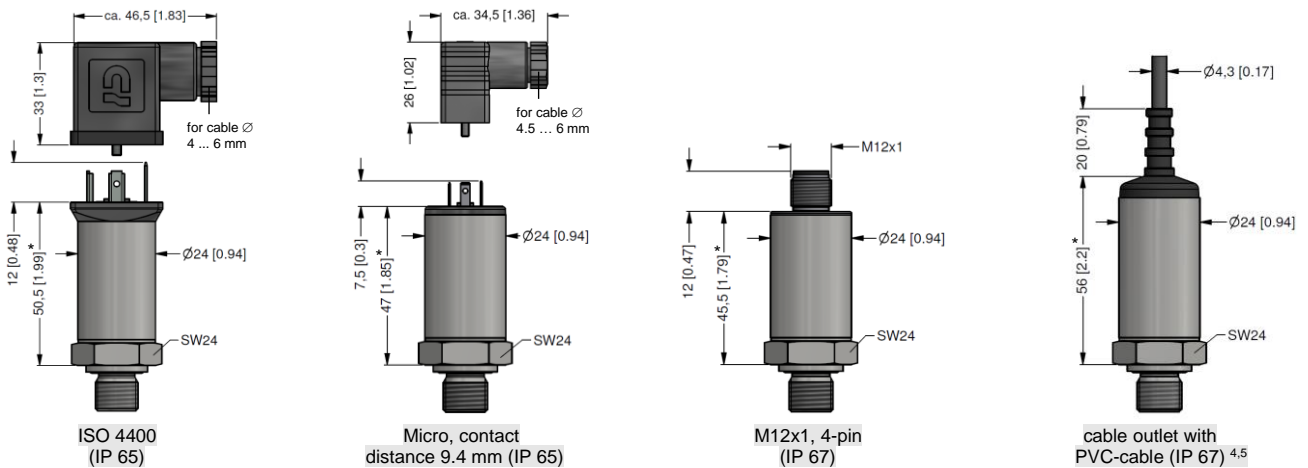

\* pressure range p<sub>N</sub> = 400 bar: total length increases by 12 mm

<sup>4</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

<sup>5</sup> different cable types and lengths available, permissible temperature depends on kind of cable

### Mechanical connection (dimensions mm / in)

