


ADAPTOR M12 MALE/ M8 FEMALE 4 POLE CONF. 1,2,3,4

Adapter
Male/Female
M12 - M8, 4-pole
for M12 distribution box 4-pole



[Link to Product](#)


Illustration

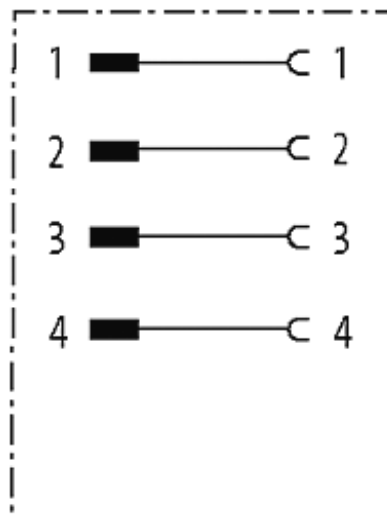

Male

Female



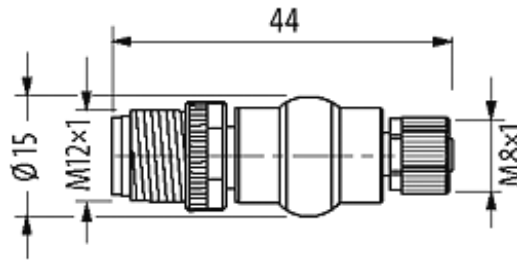

Product may differ from Image

Form

Form 42211

Technical Data

Operating voltage	max. 30 V AC/DC
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
Locking of ports	Screw thread M8/M12 × 1 mm (recommended torque 0.4/0.6 Nm), self-securing
Compression gland	M8 (SW9), M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PUR

General data

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kVrms
Pollution Degree	3

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879143196
eClass	27061801
minimum order quantity	1