



Best.-Nr.: A ST A 000 NN 00 41 0235 000

Technische Daten

Temperaturbereich	-20 °C bis 130 °C
Kabelklemmbereich	ø 6,0 bis ø 10,0 mm
Schutzart	gesteckt 66/67 IP

Werte nach VDE 0110/EN 61984, Abschnitt 6.19.2.2

Verschmutzungsgrad	3
Überspannungskategorie	III
Aufstellhöhe	2000 m


Werkstoffe

Gehäuse	Zinkdruckguß, vernickelt
Dichtungen	FKM
Klemmring	Messing, vernickelt

Kontakte (nicht im Lieferumfang enthalten)

Werkzeuge (nicht im Lieferumfang enthalten)

digitale Crimpzange	Best.-Nr.:C0.235.00
(analoge Crimpzange)	Best.-Nr.:C0.101.00

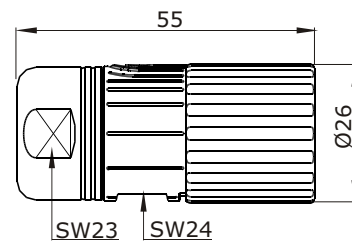

Hauptabmessungen
Stecker



order code: A ST A 000 NN 00 41 0235 000

Technical Data

temperature range	-20 °C to 130 °C
clamping range	ø 6.0 - ø 10.0 mm
protection type	IP 66/67 when connected

Data According to VDE 0110/EN 61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m


Material

housing	zinc diecast, nickel plated
sealing	FKM
clamp nut	brass, nickel plated

Contacts (not part of product contents)

Tools (not part of product contents)

digital crimping tool	order code:C0.235.00
(analog crimping tool)	order code:C0.101.00)

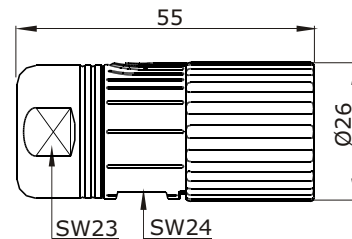

Main Dimensions
plug